

# BRAWO<sup>®</sup> SYSTEMS LIGHT CURING SYSTEM



**NEW**

## BRAWO<sup>®</sup> Magnavity **SX** smart • efficient • strong

**CE conform  
+ NRTL  
certified**




**Range of  
60 metres**

## YOU SAVE TIME AND EFFORT

The innovative and unique LED heads allow simultaneous insertion with inversion of the liner. Curing is thus carried out immediately after installation of the liner, without the need for additional insertion of the reel.

BRAWO® Magnavity SX stands for maximum flexibility and is perfectly matched to the installation of the BRAWOLINER® product line.

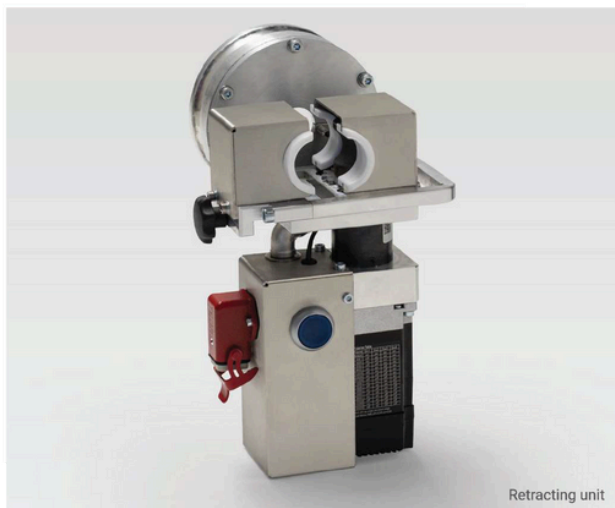

## LIGHT CURING ON THE NEXT LEVEL!

Experience fast, reliable and above all smart light curing with „BRAWO® Magnavity SX“. Guaranteed with the usual installation safety and high quality from BRAWO® Tech.

### Technical data BRAWO® Magnavity SX

<b>Curing:</b>	<b>possible from 3" to 12"</b> (DN 70 to DN 300)
<b>Max. range (hose length):</b>	<b>60 m</b> (196 ft)
<b>Retraction speed:</b>	<b>0.1 – 2.0 m/min</b>
<b>Head diameter Nano:</b>	<b>45 mm</b> (pipe range 4" – 8")
<b>Head diameter Mega:</b>	<b>80 mm</b> (pipe range 6" – 12")
<b>Weight:</b>	<b>70 kg</b> (approx. 155 lbs)
<b>Dimensions (L x W x H mm):</b>	<b>735 x 490 x 975</b>

### smart

- Intelligent LED heads with integrated magnetic coupling for electromagnetic remote unlocking
- Installation log and interface to mobile end device (USB, W-LAN)
- Reversible dual camera
- Exchangeable LED head with integrated operating hours monitoring
- Plug & Play: Automatic recognition of the LED head used

### efficient

- Low power consumption with high light output
- 96/192 High-performance UV LEDs with extremely high efficiency
- Saves a complete operation
- "Turtle" function for safe curing in the inlet area

### strong

- Very fast curing
- Very good bend flexibility, 87° possible from 4" (DN 100)
- Easy transportation thanks to modular, lightweight construction

**GIVE US A CALL TODAY!**

